

Fiber Optic Patch Panel

Technical data pages by Spectrum

Fiber Optic Panel, 1 U, 19 in, unloaded, Black
24 LC/UPC duplex



Part Number: 023810



Description

Spectrum 24 Ports Sliding Patch Panel is suitable for LC Duplex. The panel can also be preloaded completely with the required adapter and simple management kit. The sliding system in its basic form can be supplied with or without adapters. The tray is locked in place and has two plastic catches for simple installation. When fully extended, the tray is designed to lower at 45 degrees or move the tray to the side and locks at 10 degrees only. It fully provides a perfect

Features

- Sliding and 15° Tilt-down Drawer for Easy Deployment
- Compatible with Cassettes, Panels, and Splice Trays
- Up to 48 Fibers (LC) or 24 Fibers (SC)
- Space Saving 1U Design, Mount to Standard EIA 19" Rack Rails
- No Need for Additional Tools Enabling Faster MACs
- Rear Cable Management Maintains Proper Slacking and Spooling

Standards Compliance

- RoHS Compliant
- ISO9001 Certificate
- WEEE Certificate

Fiber Optic Patch Panel

Technical data pages by Spectrum


Fiber Optic Panel, 1 U, 19 in, unloaded, Black
24 LC/UPC duplex



Technical Descriptions

General Specifications	
Number of Rack Spaces	1U
Fiber Count	48 Fibers (LC)
Product Type	Sliding
Cable Entry Direction	Rear Cable Entry
Loaded	Loaded & unloaded
Material	Steel, Powder-coated Black
Working angle	15°
Weight	2.44kg
Mounting Type	Rack Mount
Installation	Standard EIA 19" Rack Rails
Dimensions (HxWxD)	430x205x44mm

Environmental Characteristics	
Operating Temperature	25°C to 50°C
Storage Temperature	-40°C to 65°C
Installation temperature	0°C to 50°C
Salt Mist Cyclic Test	48H

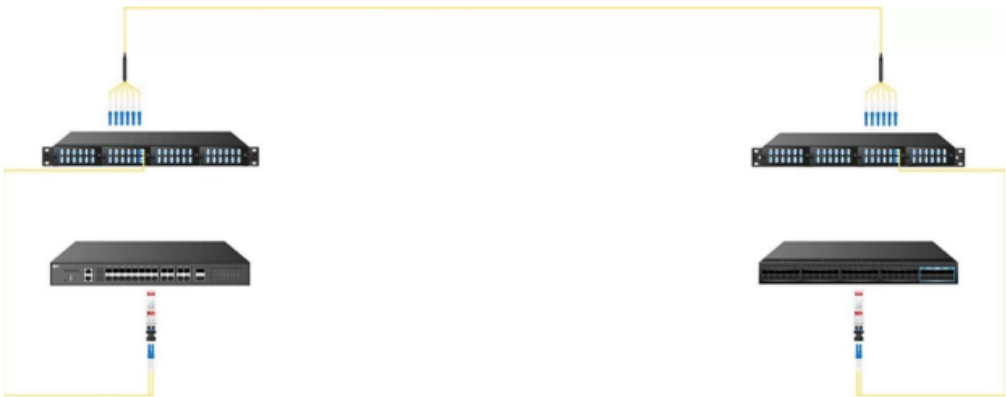

FIBER PATCH PANEL